


APPROX. WEIGHTS
 PUMP ASSY - DRY 425 [193]
 IMPELLER/SHAFT ASSY 84 [38]
 HOUSING* 75 [34]
 HEADS (EA.)* 99 [45]
 CONES (EA.)* 9 [4]
 BEARING CARRIER (EA) 11 [5]

* COMPONENTS ARE IRON. FOR S/STL ADD 13%.

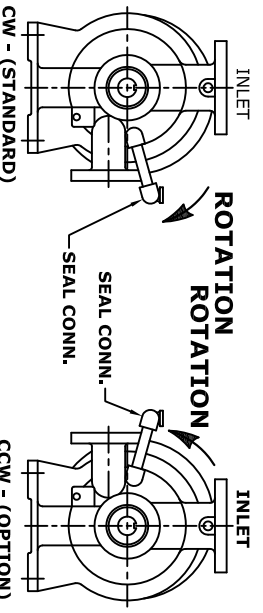

ASSY POSITIONS
(FACING DRIVE END)

- GENERAL NOTES:
- 1) PRIMARY DIMENSIONS ARE IN INCHES. [mm]
 - 2) FLANGES TO ANSI B16.5 CLASS 125 BOLT PATTERNS AND THICKNESS. BOLT HOLES STRADDLE CENTER LINES.
 - 3) PIPE THD. CONNECTIONS ARE ANSI B2.1.
 - 4) SHROUD VENT PIPING FURNISHED ONLY ON "-M" AND "-H" MODELS.

PUMP FOOTING

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF VOONER FLOGARD CORPORATION, CHARLOTTE, NC. 28273 U.S.A. WRITTEN PERMISSION MUST BE OBTAINED FROM VOONER FLOGARD CORPORATION TO DISCLOSE TO OTHERS ANY INFORMATION CONTAINED HEREON. THIS DOCUMENT, AND COPIES THEREOF, ARE SUBJECT TO IMMEDIATE RETURN TO VOONER FLOGARD CORPORATION ON REQUEST.

Vooner Flogard CORPORATION
 CHARLOTTE, NC 28273

OUTLINE DRAWING
VG3

SIZE	FSCM NO.	DWG NO.	REV
A	NONE	VG3	B
Scale: none	9/24/07	Sheet: 1 of 1	