



Date: 2/11/08

Supersedes: 7/18/06

TECHNICAL DATA SHEET

VOONER FLOGARD® LIQUID RING VACUUM PUMP

Specified, constructed, tested, and guaranteed by:

Vooner FloGard® Corporation

P.O. Box 240360, Charlotte, NC 28224-0360
4729 Stockholm Court, Charlotte, NC 28273

Telephone: (704) 552-9314
Toll Free: 1-800-345-7879
Telefax: (704) 554-8230

Model: V4R95 (DIN)

Type: Single stage rotor, cone shape ports, liquid ring vacuum pump

Sealing liquid flow rate nominal: 15”HgV (-L cone) - 150-190 lpm
20”-24”HgV (-M cone) - 285-320 lpm
24”-28”HgV (-H cone) - 455-530 lpm

Sealing liquid connection: 1 1/2” NPT

Shaft sealing: Packing

Shaft diameter, drive end: 177.8 mm

Pump flange connections: 300 mm inlet (2), 250 mm outlet (2)

Approximate pump weight: 7,250 kg

MATERIAL CONSTRUCTION FEATURES

Model	Rotor	Cones	Heads	Bearing Carrier	Housing	Shaft	Pkg Gland, Studs, Nuts
A	Ductile Iron	Cast Iron	Cast Iron	Carbon Steel	Cast Iron	Carbon Steel	316 SS
C	304 SS	304 SS	Cast Iron	Carbon Steel	Cast Iron	410 HT SS	316 SS
XVE4	304 SS	304 SS	*316 SS	Carbon Steel	**304L SS	410 HT SS	316 SS
XVE6	316 SS	316 SS	*316 SS	Carbon Steel	**316L SS	410 HT SS	316 SS
XVS	304 SS	304 SS	*316 SS	Carbon Steel	304 SS	410 HT SS	316 SS
SS4	304 SS	304 SS	304 SS	Carbon Steel	304 SS	316 SS	316 SS
SS6	316 SS	316 SS	316 SS	Carbon Steel	316 SS	316 SS	316 SS

(SS - cast stainless steel) (HT - heat treated)
(*Stainless Steel liner in cast iron housing)

(*Replaceable 316 SS Wear Plates on cast iron heads)





Vooner[®]

VACUUM PUMP, CONE PORT, SINGLE STAGE, LIQUID RING

MODEL: V4R95-L

Vacuum, "Hg

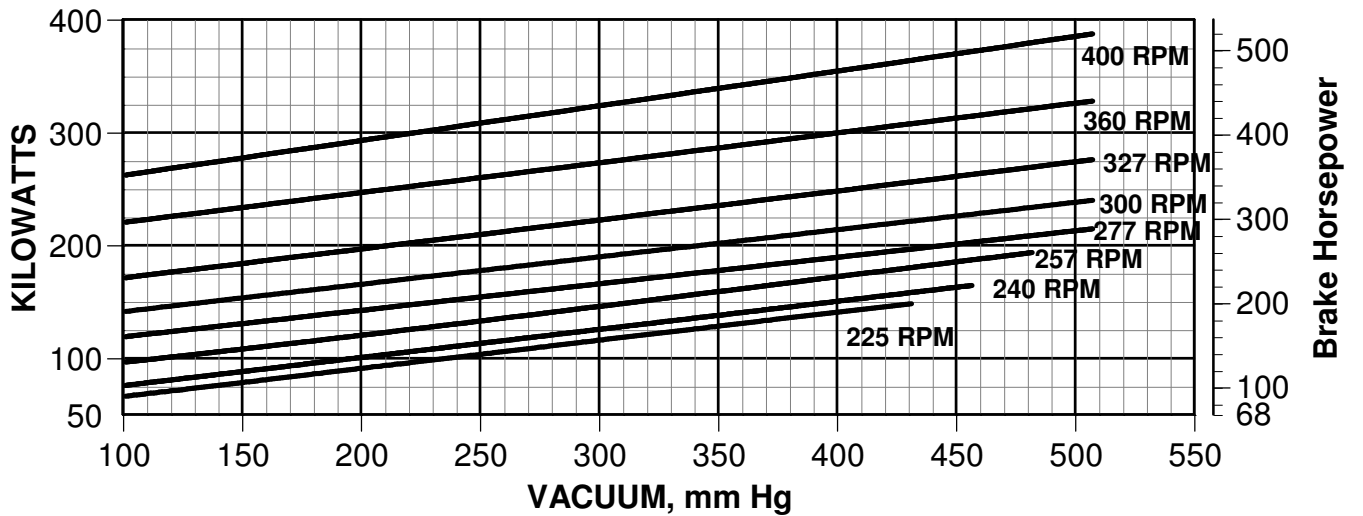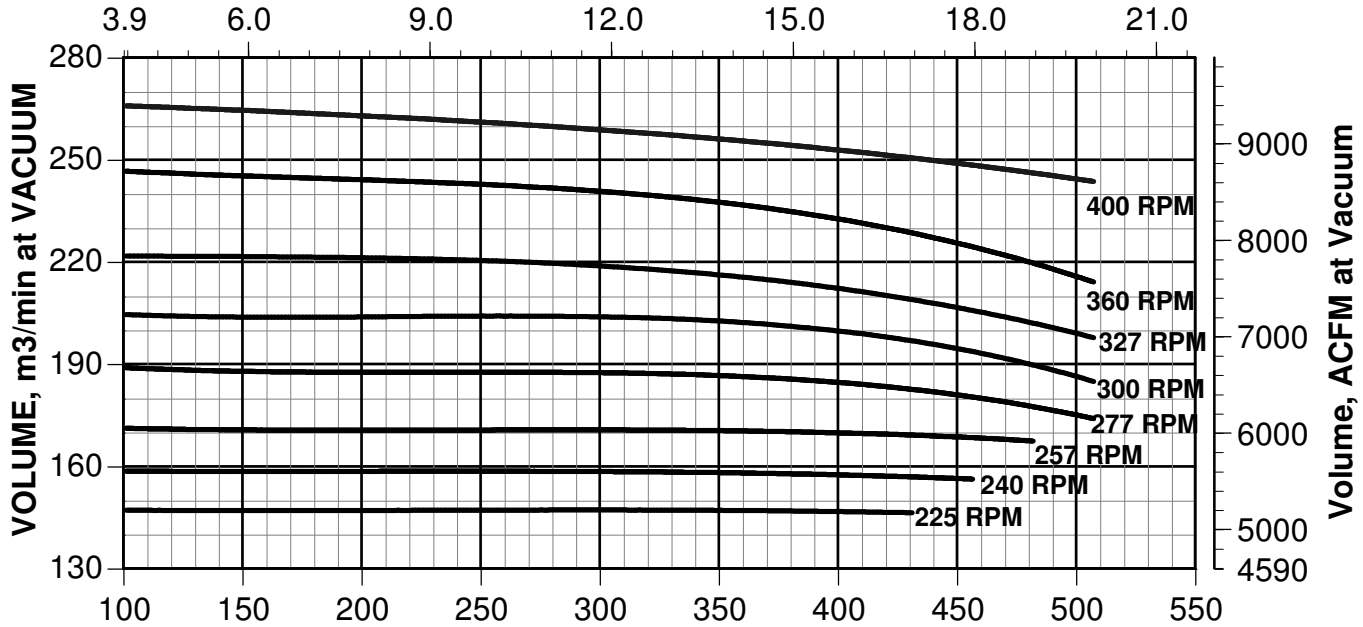

TEST DATA CONDITIONS:

INLET GAS TEMPERATURE: 15.6 C (60 F) @ 50% RELATIVE HUMIDITY

BAROMETRIC PRESSURE: 760mm (29.92") Hg ABSOLUTE

SEALING LIQUID TEMPERATURE: 15.6 C (60 F)

Issue date: 11/22/06

Supersedes date: 01/20/01

Performance to Heat Exchange Institute Standards (HEI)





Vooner[®]

VACUUM PUMP, CONE PORT, SINGLE STAGE, LIQUID RING

MODEL: V4R95-M

Vacuum, "Hg

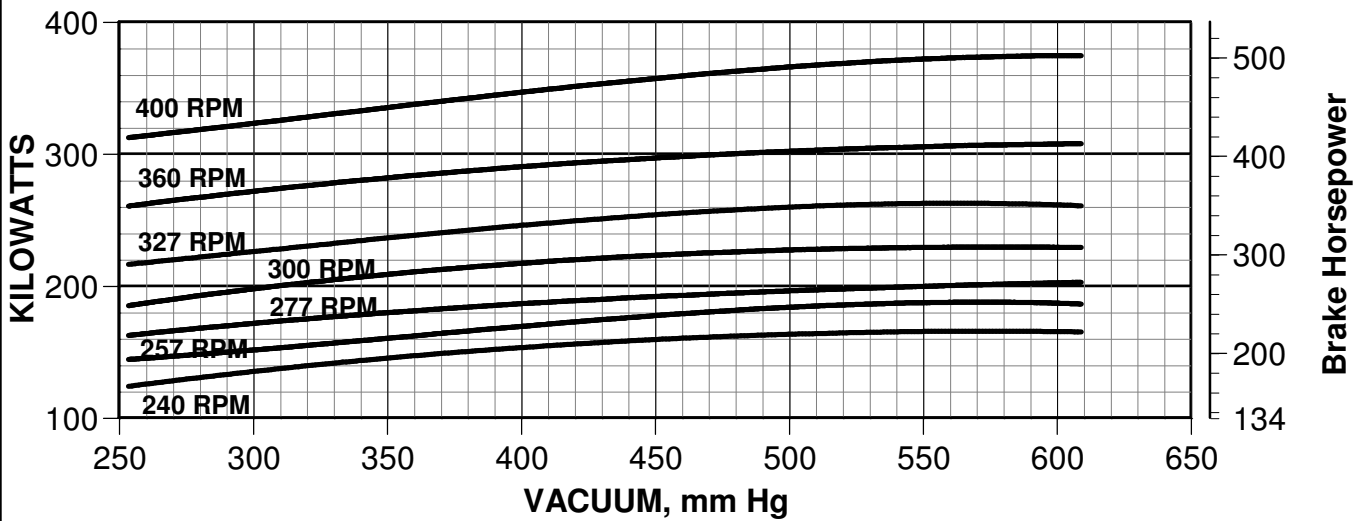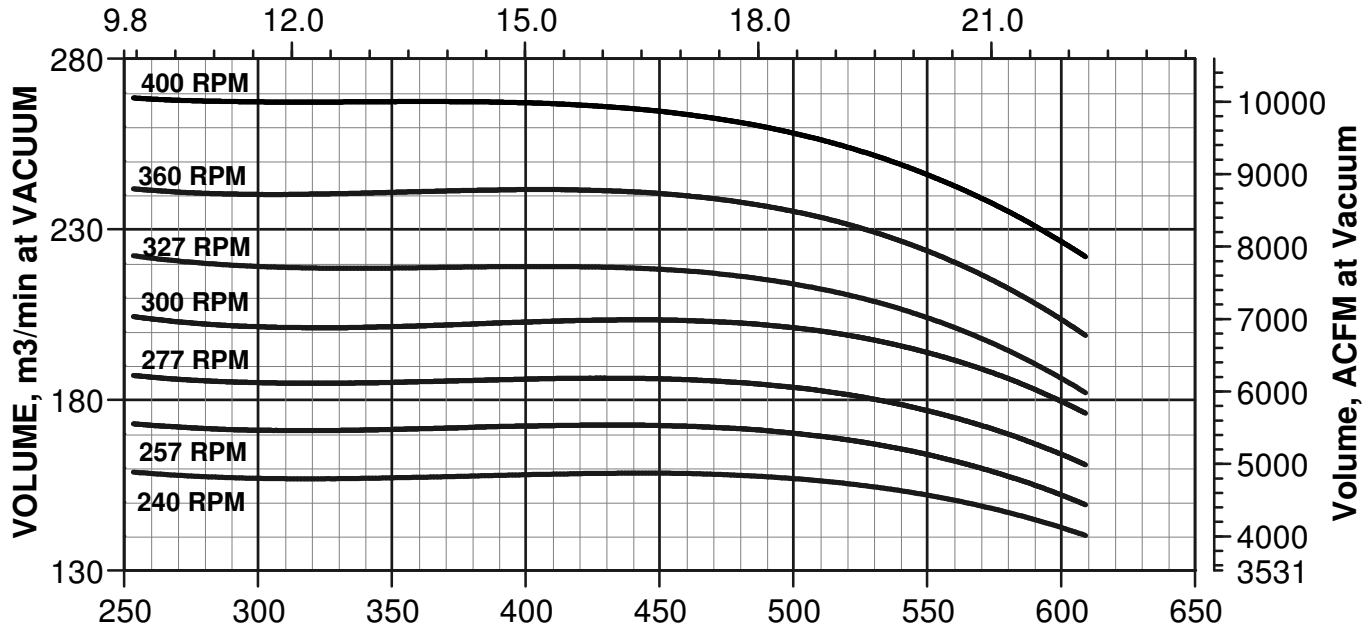

TEST DATA CONDITIONS:

INLET GAS TEMPERATURE: 15.6 C (60 F) @ 50% RELATIVE HUMIDITY

BAROMETRIC PRESSURE: 760mm (29.92") Hg ABSOLUTE

SEALING LIQUID TEMPERATURE: 15.6 C (60 F)

Issue date: 11/22/06

Supersedes date: 01/20/01

Performance to Heat Exchange Institute Standards (HEI)


Vooner[®], VaneGard[®] and FloGard[®] are registered trademarks of Vooner FloGard Corporation.
Copyright 2007, Vooner FloGard Corporation.



Vooner[®]

VACUUM PUMP, CONE PORT, SINGLE STAGE, LIQUID RING

MODEL: V4R95-H

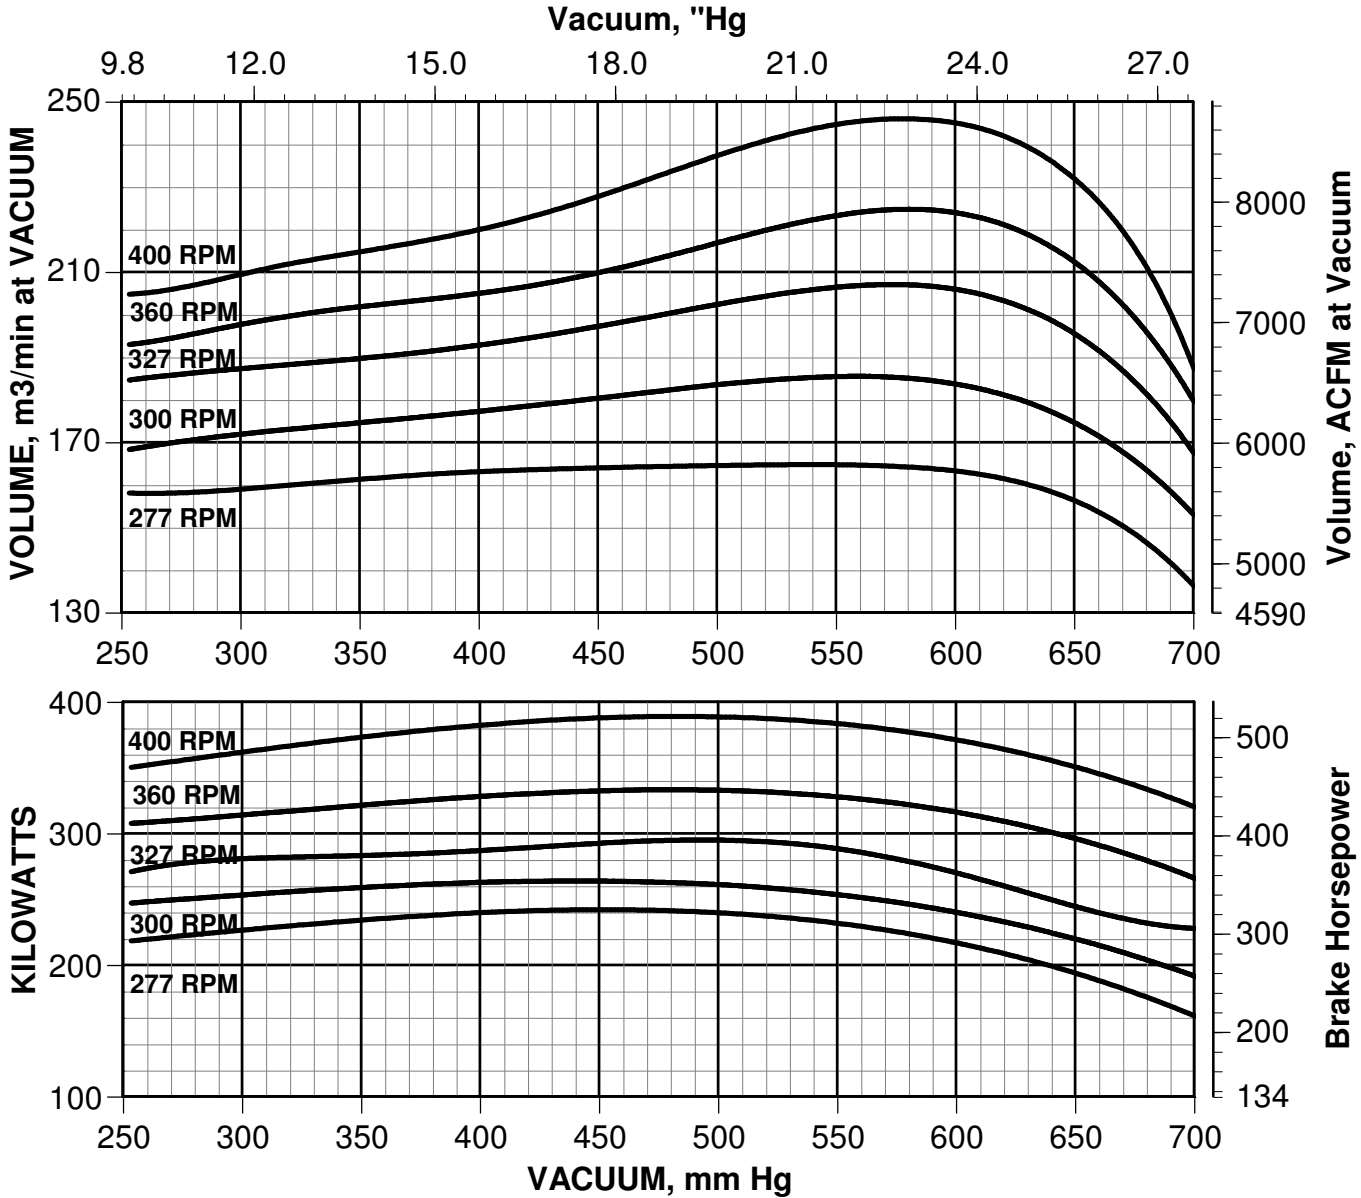

TEST DATA CONDITIONS:

INLET GAS TEMPERATURE: 15.6 C (60 F) @ 50% RELATIVE HUMIDITY





BAROMETRIC PRESSURE: 760mm (29.92") Hg ABSOLUTE

SEALING LIQUID TEMPERATURE: 15.6 C (60 F)

Issue date: 11/22/06

Supersedes date: 01/20/01

Performance to Heat Exchange Institute Standards (HEI)

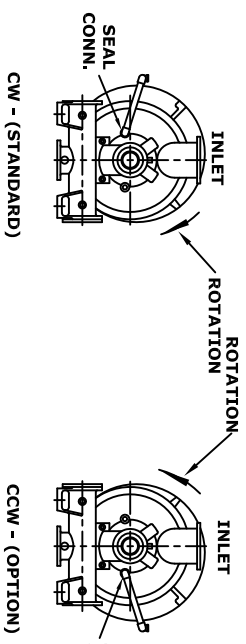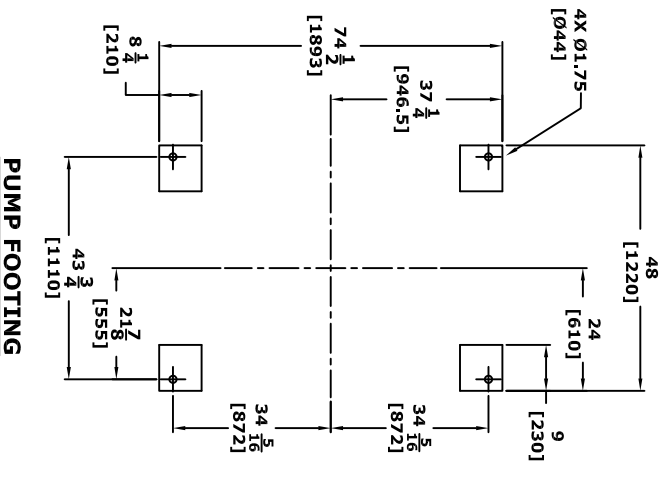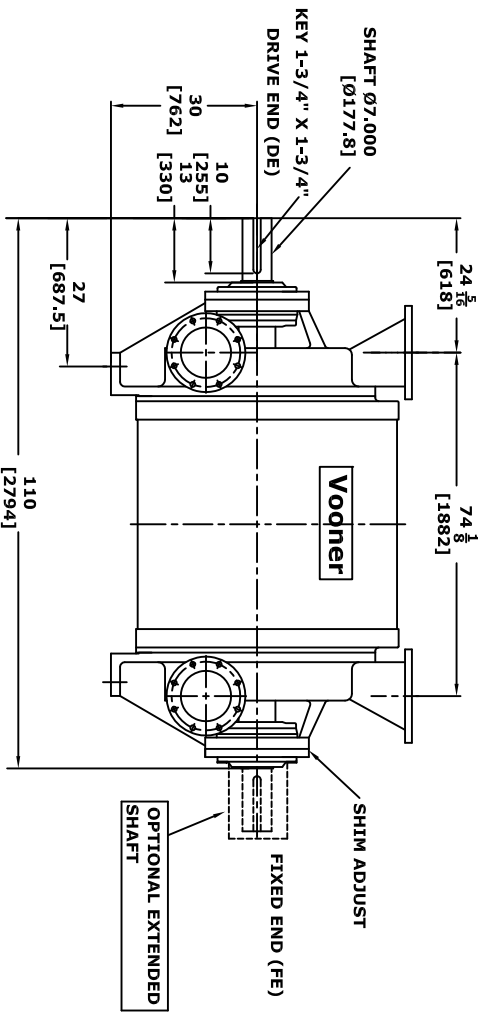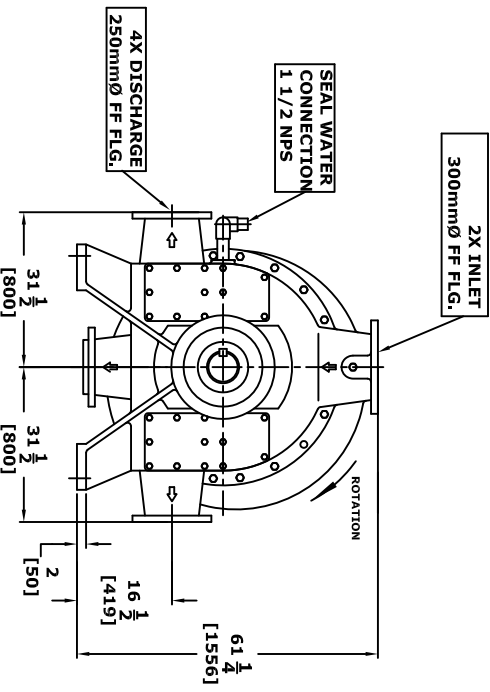

ASSY POSITIONS
(FACING DRIVE END)

- GENERAL NOTES:
 1) PRIMARY DIMENSIONS ARE IN INCHES. [mm]
 2) FLANGES TO DIN P10
 BOLT PATTERNS AND THICKNESS. BOLT
 HOLES STRADDLE CENTER LINES.
 3) PIPE THD. CONNECTIONS ARE ANSI B2.1.

APPROX. WEIGHTS

PUMP ASSY - DRY	LBS. [KG]
IMPELLER/SHAFT ASSY	15,000 [6800]
HOUSING*	5,750 [2600]
HEADS/CONE ASSY (EA.)*	3,450 [1570]
	2,500 [1130]

* COMPONENTS ARE IRON. FOR S/STL ADD 13%.

Vooner Flogard
 VOOONER FLOGARD CORPORATION
 CHARLOTTE, NC 28273

OUTLINE DRAWING
V4R95 DIN

SIZE	FSCM NO.	DWG NO.	REV
A	NONE	V4R95 DIN	C
Scale: none		7/9/08	Sheet: 1 of 1

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF VOOONER FLOGARD CORPORATION, CHARLOTTE, NC, 28273 U.S.A. WRITTEN PERMISSION MUST BE OBTAINED FROM VOOONER FLOGARD CORPORATION. TO DISCLOSE TO OTHERS ANY INFORMATION CONTAINED HEREON. THIS DOCUMENT, AND COPIES THEREOF, ARE SUBJECT TO IMMEDIATE RETURN TO VOOONER FLOGARD CORPORATION ON REQUEST.